

# BSC EX-FLOOR FOLDABLE EXHIBITION FLOOR






The decorative, flat flooring is an essential component of trade show and exhibition booths, providing a professional and polished look. Made of wood, it enhances the aesthetics of any stand while ensuring durability and stability. The flooring system allows for the concealment of utility cables, including water, power, and communication lines, ensuring a clean and organized appearance. Featuring a patented foldable frame system, the flooring is space-saving and easy to transport. The frames are unfolded, equipped with adjustable leveling feet, and then fitted with wooden platforms, ensuring a stable and seamless installation.



The aluminum frame structure surrounding each panel protects them from damage while providing a stable and robust base for the flooring system. When folded, the system takes up minimal space, making transport and storage incredibly efficient. A 200m<sup>2</sup> flooring system requires only 1m<sup>3</sup> of storage space, ensuring maximum convenience for logistics and setup.

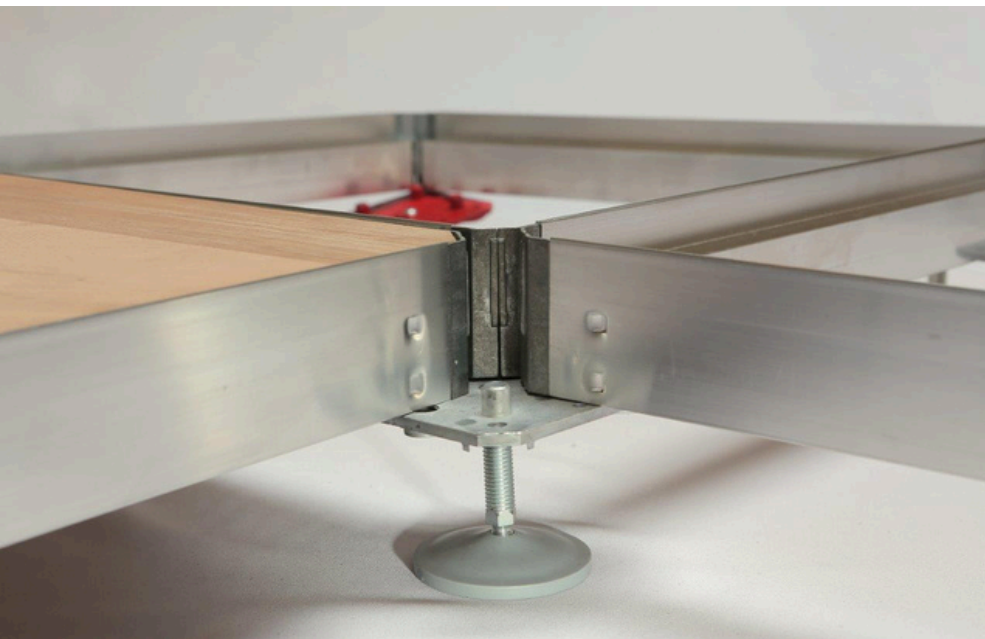

The wooden panel can be easily removed from the aluminum frame using a special lifting tool, even after the Alu Plano flooring system has been fully assembled. This feature allows for quick and convenient access to cables, wiring, and other installations located beneath the floor, ensuring effortless maintenance and adjustments.

## TECHNICAL DETAILS


STANDARD SIZE	WEIGHT	LOAD CAPACITY	FRAME HEIGHT	WOODEN BOARD THICKNESS	LEG HEIGHT
100 x 100cm;	14 kg ( frame + deck plate )	500kg/m2	60mm	22mm	9-13cm; 16-20cm
100 x 50cm;		750kg/m2			
50 x 50cm		(module with diagonal supporters ) 1000 kg/m2 (module with cross supporters )			



Even after the assembly has been completed, the floor can be levelled with an adjusting tool from above for compensation of uneven underground up to approx. 4 cm.

The BSC EX-Floor **stabilizing legs** allow for precise height adjustment of the floor's center, edges, and corners, with available height ranges of 9-13 cm or 16-20 cm. This ensures a perfectly level surface, even on uneven ground.

For large-scale flooring installations or areas subject to extreme point loads, **diagonal and cross supporters** are installed to enhance structural integrity. Additionally, for extra reinforcement, stabilizing legs can be mounted in the center of each panel, ensuring maximum durability and load distribution.

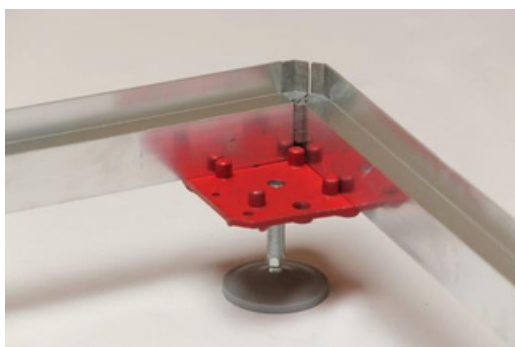

**Filling caps** serve as covers for the adjustment openings used for leveling the floor, ensuring a clean and polished look. **The two-piece finishing strip** consists of a straight profile and a 90° angled profile. The straight profile is placed against the edge of the frame and the ground line, while the angled profile is securely fastened to the wooden panel. This system provides a precise and aesthetically refined finish for the BSC EX-Floor, enhancing both durability and appearance.





**Sale:**

Agnieszka Prachniak

Mobile: +48 691 444 418

agnieszka@bscsystem.pl

**BSC System Sp. z o.o.**

**Office:**

ul. Mehoffera 122

03-158 Warsaw

**Contact:**

Tel.: (+48) 22 301 07 08

Mobile: (+48) 517 860 780

info@bscsystem.pl